FLETCHER

The Fletcher-Terry Company

Cut clean, straight, accurate, & debris-free.

FSC Substrate Cutter

FSC
FLETCHER *Substrate Cutter*

Cut clean, straight, accurate and debris-free!

Fletcher-Terry introduces the FSC, an affordable finishing solution designed for virtually any sign making or graphic development business, working in a pre- or post-print process. Cut clean, straight, accurate and debris-free materials such as:

- Dibond® (4mm)
- Aluminum (.063")
- PVC (13mm)
- Acrylic (1/4")
- Polycarbonate (1/4")
- Polystyrene (1/4")
- Corrugated Plastic (13mm)
- Alumalite™ (1/4")
- Econolite™ (1/4")
- Gatorboard (1/2")
- Foamboard (1/2")
- Glass (1/4")

The FSC will surprise you with its ability to provide quick and accurate cutting of a wide variety of your most common substrates. Robust and engineered for durability, the FSC will provide years of flawless cutting performance in your shop.

A unique cutting process provides **virtually no debris** making it a perfect match for any flat bed printer.
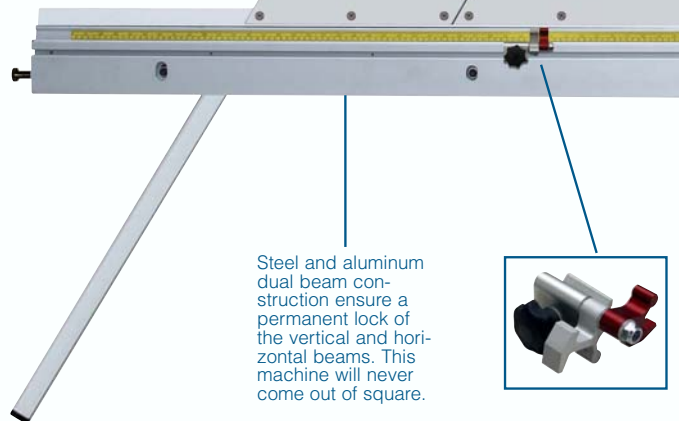
A surprisingly affordable cutting solution, the FSC is simply one of those products you must see to believe.

Cut up to 4mm Dibond in one pass with ease, leaving clean, finished edges every time.

Fletcher-designed extended life blade provides hundreds of cuts in a wide variety of materials with flawless performance.

Steel and aluminum dual beam construction ensure a permanent lock of the vertical and horizontal beams. This machine will never come out of square.

Our product packaging is made from recycled materials.

Call your distributor, visit us at a show or log onto our wel

Quick and simple one person assembly with new dual purpose vertical mounting beam. Wall mount or operate as a free-standing system, no additional stand kit is required.

Innovative material clamp provides even and secure clamping force on rigid and soft substrates of varying thicknesses. This clamp locks in place, enabling angled cuts and eliminating movement of the material during the cut.

Convenient blade holder specifier indicates which blade holder to use for each substrate.

Substantial cast aluminum cutting head, ergonomic "T" handle bar, power-lock rod and innovative glide bearing system.

Color-coded production stops make repetitive cuts for production runs quick and accurate.

Unique clamp design makes on machine break-out (run of score) possible for acrylic and polycarbonate materials, as well as glass.

Laser guide provides a perfectly clear sight line for the cut on all substrates, eliminating guesswork and costly errors in a pre- or post-printing process.

Five-second blade change... Switch to any substrate quickly with our proven blade holder system.

Cut clean, straight, accurate and debris-free.

Aluminum

Acrylic

Alumalite™

Dibond®

Polycarbonate

Corrugated Plastic

Foamboard/Gatorfoam

PVC

SPECIFICATIONS

	Mount/Stand	Wall
Height	93" (2.36M)	95" (2.41M)
Width	80" (2.03M)	80" (2.03M)
Depth	43" (1.09M)	17" (0.43M)
Weight	115 lb. (52kg)	
Cut Capacity	65" (1.65M)	

Two (2) year warranty

FLETCHER®

Time-Tested Cutting Technologies
These are the cutting tools that provide the FSC with nearly unlimited scalability.

1/2" / 13mm Blade Holder
Foamboard, gatorboard, corrugated plastics, PVC and other foam, paper, and plastic based products, up to 1/2" (13mm) thick *(INCLUDED)*.

1/4" / 7mm Blade Holder
Offers greater blade support in 1/4" (7mm) thick materials *(OPTIONAL)*.

Aluminum Composite Cutting Wheel Holder
Aluminum faced materials such as **DiBond**® and **AlumaLite™** to a max thickness of 1/4" (7mm) *(INCLUDED)*.

Aluminum Cutting Wheel Holder
Aluminum sheet materials up to .063" (1.6mm) thick *(OPTIONAL)*.

Acrylic Blade Holder
Any material you plan to score and break *(INCLUDED)*.

Glass Scoring Wheel Holder
Score and break glass up to 1/4" (7mm) thick *(OPTIONAL)*.

Also included in the FSC package are the laser sight-line accessory, the blade holder tool caddy, and the free-standing kit.

Be sure to check out our entire line of products.

Substrate Cutter

Cutters/Trimmers

FLETCHER

The Fletcher-Terry Company

Form 00335-B